




### Load Cell Specification:

Model	MTA	MTS
Capacity	50, 100, 150, 250kg	500lb, 1k, 2k, 3k, 5k, 10k, 20klb 500, 1000, 2000, 5000, 10,000kg
Sensitivity MV/V	3 ± 0.01	
Zero Balance	< 2% of Full Scale	
Creep ( 1 hour )	< 0.03% of Full Scale	
Non-linearity	< 0.03% of Full Scale	
Hysteresis	< 0.03% of Full Scale	
Repeatability	< 0.02% of Full Scale	
Temperature effect on Output	< 20PPM / °C of Applied Load	
Temperature effect on zero	< 20PPM / °C of Applied Load	
Operating temperature range	- 20 °C to 60 °C	
Compensated temperature range	- 10 °C to 50 °C	
Safe Overload	1.5 x Capacity	
Input Impedance	400 ± 10 Ohms	
Output Impedance	350 ± 5 Ohms	
Insulation Resistant	> 2,000 Meg - Ohms	
Recommended Excitation	10 V DC/AC	
Maximum Excitation	15 V DC/AC	
Cable Length	6 m / 10m	
Environmental Protection	IP 67	

### Dimension:

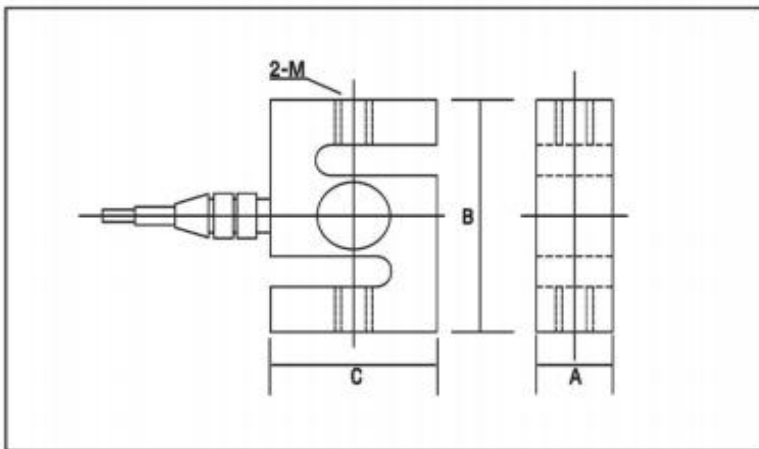

Rated Load		Size: mm			Whorl	
Lb	Kg	A	B	C	Mm	Inch
	MTA-50-250	20	76	51	M10 X 1.5	
MTS-1K-3K	500 - 2000	25.4	76	51	M12 X 1.5	½ -20
5K - 10K	5000	25.4	108	76	M20 X 1.5	¾ -16
20K	10000	51	178	127	M30 X 3.5	1¼ -12

### Cable Color Code

Red	+ Excitation
Black	- Excitation
Green	+ Signal
White	- Signal

\* Designs and specifications are subject to change for improvement without prior notice.

## BAN HING HOLDING SDN BHD

No. 13-3, Jalan Raja Laut, 50350 Kuala Lumpur, Malaysia.

Tel: 603-4048 1000 / 4042 5970

Fax: 603-4050 8000

Website: [www.banhing.com](http://www.banhing.com)

Email: [sales@banhing.com](mailto:sales@banhing.com)