

Features:~

- ❖ Multi-weighing units:
Kg, lb, N are selectable, generally kg is the default unit.
- ❖ Multi-function operation:
Tare, Zero, Auto zero tracking, Total, Hold, Overload warning, operation through remote controller functions.
- ❖ User-friendly design:
Cast aluminum housing for maximum protection: Large red 5 digit LED display (digit height 30mm); Battery Operated with low battery indication; Automatic turn off, power-saving function.



www.banhing.com



Accessories



Infrared remote control



Adaptor(DC9V/1000mA)

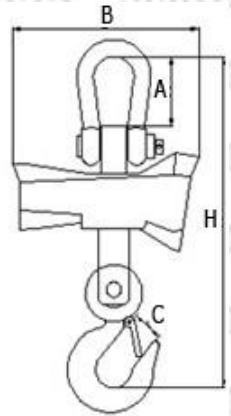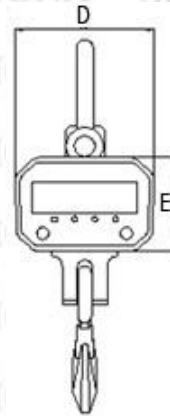

Specification :~

MODEL	CAPACITY	DIVISION	DIMENSION(MM)	WEIGHT
14192-701E-2T	2000kg	1kg	95(A)x260(B)x40(C)x195(D)x135(E)x430(H)	11.5KG
14192-701E-3T	3000kg	1kg	95(A)x260(B)x40(C)x195(D)x135(E)x430(H)	11.5KG
14192-701E-5T	5000kg	2kg	120(A)x325(B)x50(C)x240(D)x165(E)x535(H)	17.5KG
14192-701E-10T	10000kg	5kg	124(A)x325(B)x60(C)x240(D)x165(E)x660(H)	27.5KG

* Designs and specifications are subject to change for improvement without prior notice.

萬興企業有限公司

BAN HING HOLDING SDN BHD

No. 13-3 Jalan Raja Laut, 50350 Kuala Lumpur, Malaysia

Tel: +603 4048 1000

Fax: +603 4050 8000

WEB: www.simona.com.my

Email: enquiry.simona@gmail.com